

Cobham Antenna Systems

Microwave Antennas

Specialist Antenna Design and Manufacture
Electronic Warfare Antennas

COBHAM

The most important thing we build is trust



Man Pack
Antennas



Antennas
for Light
Vehicles



Antennas
for
Armoured
Vehicles



Control
links and
robotics



High Power Planar Spiral Antennas

High Power Planar Spiral Antennas

The flat-panel, reflector-backed spiral has no absorber so it can handle up to 100Watts, fully efficiently, with up to 8dBi peak gain, giving an impressive level of EIRP for Countermeasures.


Like their receive-only cavity-backed spiral counterparts, the reflector-spiral antenna provides circular polarisation which can have benefits in many scenarios where the polarisation of the threat signal is unknown.

Very wide bandwidths of 10:1 and more have been achieved with better than 10dB return loss and without tuning circuits. Products working down to 150MHz have been developed (900mm/36inches square) with the low frequency response being directly proportional to the dimensions of the antenna.

Where it may be useful to provide signal in opposite directions simultaneously (peanut-shaped) from one structure, a variation of the planar spiral is one which is bi-directional. In this structure the peak of beam is from both flat faces of the antenna simultaneously and the gain is 3dB lower than for the equivalent size reflector-spiral, but remains just as efficient.

The planar spiral also has uses for multi-band communications in commercial applications such as in-building Distributive Antenna Systems (DAS) for cellular, WiMAX and emergency services.

High power spiral element



Balun

Spiral

Connector

Section view through planar spiral

Antenna	Frequency GHz	Gain dBi	Beamwidth Az° El°		Polarisation	Dimensions mm	Connector	Power W	Photo +
UWBA15300/1221	0.15 - 3.00	-2 to +8	60	60	Right Circular	705x671x36	N(F)	100	+
PES-200-500-NC/581	0.20 - 1.00	2	n/a	n/a	Dual Circular	560x372x34	N(F)	200	+
PSA-50200-LP/1211	0.50 - 3.00	8	70	60	Right Circular	490x365x30	N(F)	100	+



UWBA15300/1221



PES-200-500-NC/581



High power planar spiral antenna mounted under vehicle provide countermeasures

Electronic Warfare

Ultra Wideband Omni Antennas



Left to right
 XPO2V-2.0-18.0/1397
 XPO2V-0.8-6.0GF/1441

Ultra-wideband Omni-directional antennas

Biconical omnis are fully efficient, vertically polarised broadband antennas which have 1-3dBi gain across the band with low azimuth ripple and typical elevation beamwidths of 60°. This provides excellent coverage whatever the orientation of the vehicle or man-pack. Being centre-fed and ground-plane independent, the peak gain is on the horizon across all bands so that high power can be delivered where needed.

Biconical antennas can be configured to have bandwidths up to 30:1. At lower frequencies the diameter becomes disproportionately larger, so the slimmer hybrid-bicones can be used which have bandwidths up to 5:1.




XPO2V-0.8-6.0-GF/1441

- Frequencies from 100MHz to 18GHz
- Ground plane independent
- Vertically polarised
- Elevation HPBW typically 60°
- Typically 1 to 3dBi gain across the band
- Excellent azimuth ripple
- High power
- Peak gain on horizon across bandwidth


Azimuth Pattern

The measured azimuth pattern shown for XPO2V-0.8-6.0-GF/1441 demonstrates very low azimuth ripple, which is essential to ensure maximum area protection

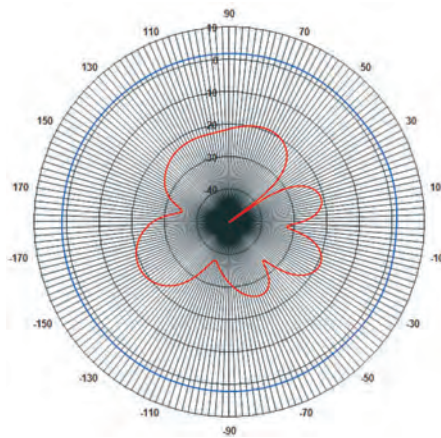

Elevation Pattern


The measured elevation pattern shown for OA2-0.3-10.0V/1505 demonstrates that the peak gain is on the horizon and remains so across all frequencies

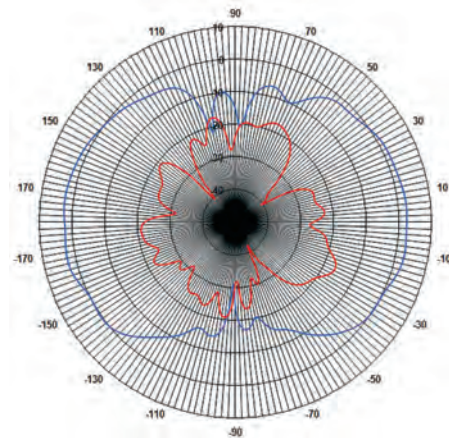

Bicone Omni antennas

Hybrid bicone has smaller diameter than bicone, and up to 5:1 frequency bandwidth

True biconical element provides up to 30:1 frequency bandwidth



Multi-stacked Omni-directional antennas

To cover very wide bands without obvious frequency gaps, "Feed-Through" technology has been developed which allows several wideband omni antennas to be 'stacked' so that they may be designed into a single housing. A stacked omni will have a single mounting point on a vehicle, saving space and reducing the shadowing of one antenna with another.

As a bonus, high isolation between antennas allows systems with the capability of providing overlapping frequencies to target multiple threats without self-jamming.

- New feed-through technology allows multiple antennas to be co-located, saving space and shadowing
- Overlapping frequencies for multiple applications
- High isolation between bands
- 200W per band simultaneously
- Good return loss across all bands
- Optional spring with NATO mount


Ultra Wideband Omni Antennas

Omni antennas on light vehicles for army patrols



Omni Antenna Matrix - Single and Multi-stacked

Some of the standard ultra wideband omni antennas that form the cornerstone of multi-stacked omnis and new development projects

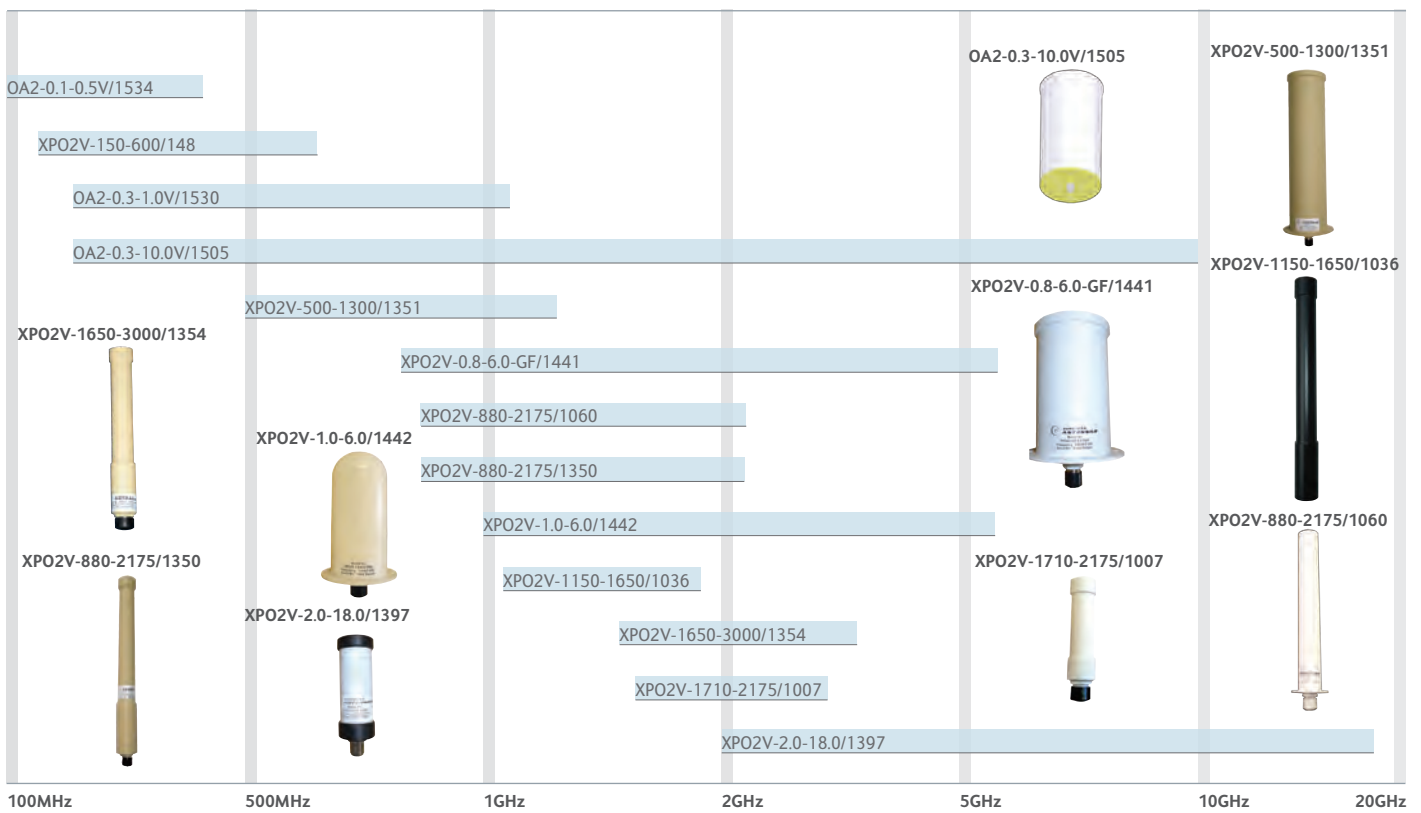

Ultra-wideband Omni-directional antennas

Antenna	Frequency GHz	Gain dBi	Beamwidth Az° El°		Polarisation	Dimensions mm	Connector	Power W	Photo +
OA2-0.1-0.5V/1534	0.13 - 0.50	0 (<200) 2 (>200)	360	60	Vertical	855x104 Ø	N(F)	50	
XPO2V-150-600/148	0.15 - 0.60	2	360	80	Vertical	805x155 Ø	N(F)	250	
OA2-0.3-1.0V/1530	0.30 - 1.00	2	360	60	Vertical	472x104 Ø	N(F)	50	
OA2-0.3-10.0V/1505	0.30 - 10.0	2	360	65	Vertical	305x161 Ø	N(F)	100	+
XPO2V-500-1300/1351	0.50 - 1.30	2	360	80	Vertical	338x108 Ø	N(F)	100	+
XPO2V-0.8-6.0-GF/1441	0.80 - 6.00	2	360	75	Vertical	143x108 Ø	N(F)	100	+
XPO2V-0.8-6.0/1485	0.80 - 6.00	2	360	75	Vertical	143x108 Ø	N(F)	100	+
XPO2V-880-2175/1060	0.88 - 2.17	2	360	50	Vertical	221x31 Ø	N(F)	50	+
XPO2V-880-2175/1350	0.88 - 2.17	2.5	360	50	Vertical	344x36 Ø	N(F)	50	+
XPO2V-1.0-6.0/1442	1.00 - 6.00	2	360	70	Vertical	134x59 Ø	N(F)	100	+
XPO2V-1150-1650/1036	1.15 - 1.65	2	360	70	Vertical	249x25 Ø	N(M)	25	+
XPO2V-1650-3000/1354	1.65 - 3.00	2	360	80	Vertical	253x25 Ø	N(F)	50	+
XPO2V-1710-2175/1007	1.70 - 2.17	3	360	50	Vertical	147x26 Ø	N(F)	50	+
XPO2V-2.0-18.0/1397	2.00 - 18.00	2	360	70	Vertical	104x39 Ø	N(F)	50	+
XPO2V-4.0-18.0/1382	4.00 - 18.00	2	360	60	Vertical	78x26 Ø	N(F)	40	

Electronic Warfare

Cavity-Backed Spiral Antennas - Receive only

Omni antennas on armoured vehicles



Cavity-Backed Spiral Antennas - Receive only

The cavity-backed spiral is the traditional antenna that provides very wide bandwidth, circular polarization and high fidelity monotonic patterns and is the mainstay of an EW direction-finding system for instantaneous threat analysis.

The spiral element comprises two parallel transmission lines formed into a planar spiral which are fed via a broadband balun, usually at the centre point of the spiral. The highest frequency of the spiral is determined by the fineness of the feed structure at the centre of the spiral, whilst the lowest usable frequency is determined by its diameter.

The spiral is mounted at the front of a cavity which is filled with RF absorbing material to ensure that internal reflections, which could corrupt the forward-looking radiation patterns, are nullified.


It is important that cavity-backed spiral antennas provide a high level of fidelity from one antenna to another and therefore critical components are sourced from the same batch, with antennas manufactured and tested in batches.

To provide accurate direction finding (DF), an array of spiral antennas (usually 4, 6 or 8), each with 60-90° beamwidths are arranged to provide 360° coverage.


The antennas in a DF system must be phase and/or amplitude matched across the range of frequencies (for example 2-18GHz). This means that all spiral antennas used for this type of application must be fully characterized (at 10 to 100 frequencies) and grouped into matched batches.

High accuracy phase and amplitude measurement is carried out in the company's spherical anechoic test chamber.


Many of our standard cavity-backed spirals may be used in DF systems, covering bands from 300MHz to 20GHz, for a variety of platforms including UAVs, helicopters, sub-sonic aircraft and terrestrial systems. Special frequencies and functions can be incorporated into designs for new applications.

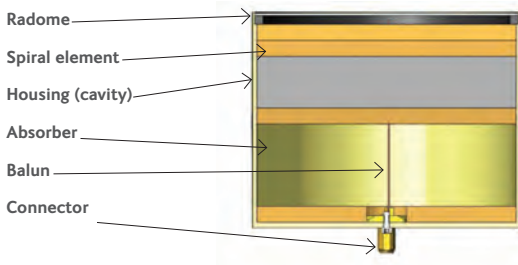

Wide band cavity-backed spirals (10) showing better than 0.4dB amplitude matching over wide beamwidth

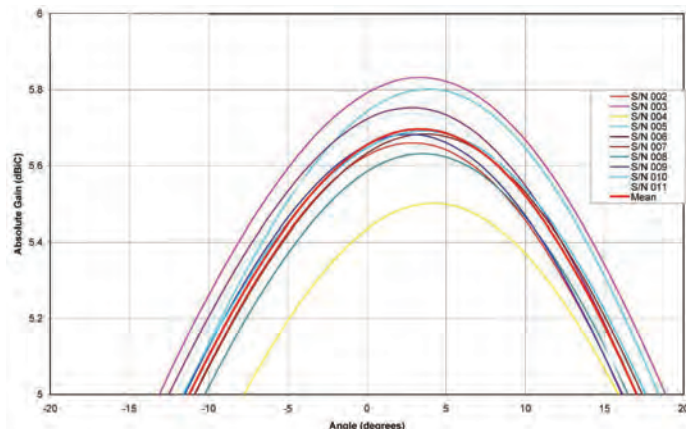

Wideband cavity backed spirals (10) at 3.5GHz showing better than 10° phase matching over ±30° in azimuth

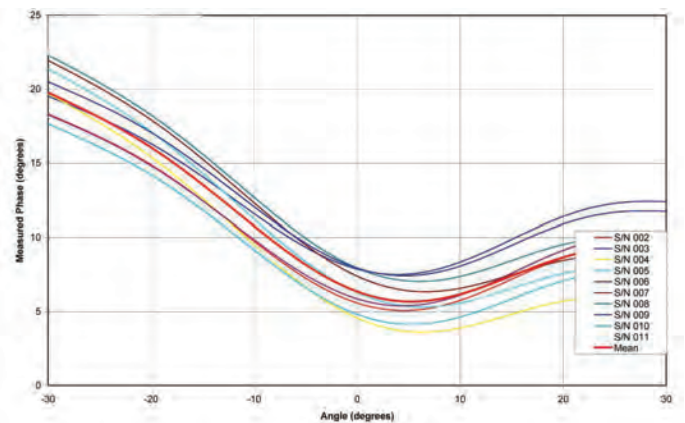

Cavity-Backed Spiral Antennas - Receive only

Cavity-Backed Spiral Antennas - Receive only

Antenna	Frequency GHz	Gain dBi	Beamwidth Az' El'	Polarisation	Dimensions mm	Connector	Power W	Photo +
PSA45010R/356	0.42 - 1.00, 1.70 - 1.90	6	90 90	Right Circular	205x374 Ø	N(F)	50	
PSA7530L/1147	0.50 - 3.00	1 (0.5) 4-6 (1-3)	70 90	Left Circular	79x240 Ø	SMA(F) 90°	2-5	
PSA75301R/170	0.50 - 3.00	4 to 6	70 90	Right Circular	57x246 Ø	SMA(F) 90°	5	+
PSA-8025R/707	0.80 - 2.50	4.5 - 8	65 65	Right Circular	48x220 Ø	N(F)	25	
PSA10401L/1169	1.00 - 4.00	4-6	90 90	Left Circular	42x150 Ø	N(F)	20	
PSA1040R/1366	1.00 - 4.00	-5 to +7.5	75 75	Right Circular	80x100 Ø	SMA(F)	5	
PSA10401R/643	1.00 - 4.00	6	90 90	Right Circular	76x150 Ø	N(F)	20	
PSA0218L/1501	2.00 - 18.00	0	75 75	Left Circular	40x51 Ø	SMA(F)	5	
PSA0218R/1142	2.00 - 18.00	0	75 57	Right Circular	40x51 Ø	SMA(F)	5	+
PSA0218L/1276	2.00 - 18.00	1(2-4) 2(4-18)	75 75	Left Circular	39x61 Ø	SMA(F)	2-5 varies across band	+
PSA0218R/1277	2.00 - 18.00	-1 to +2	75 75	Right Circular	65x68 Ø	SMA(F)	2-5 varies across band	
PSA0218R/1278	2.00 - 18.00	-1 to +2	75 75	Right Circular	39x62 Ø	SMA(F)	2-5 varies across band	
PSA0218L/1084	2.00 - 18.00	-3 to +2	75 75	Left Circular	65x68 Ø	SMA(F)	2-5 varies across band	+
PSA0218L/1361	2.00 - 18.00	-4 to +2	75 75	Left Circular	59x61 Ø	N(F)	2-5, varies across band	+
PSA0218L/1333	2.00 - 18.00	-4 to +2	75 75	Left Circular	51x61 Ø	SMA(F)	2-5 varies across band	p-2
PSA0218R/1360	2.00 - 18.00	-4 to +2	75 75	Right Circular	51x61 Ø	SMA(F)	2-5, varies across band	
PSA0218R/1362	2.00 - 18.00	-4 to +2	75 75	Right Circular	51x61 Ø	N(F)	2-5, varies across band	
PSA0818L/1045	8.00 - 18.00	4	90 90	Left Circular	21x24 Ø	SMA(F)	1	+
PSA0818R/1308	8.00 - 18.00	4	90 90	Right Circular	21x24 Ø	SMA(F)	1	



PSA75301R/170



PSA0218R/1142



PSA0218L/1276



PSA0218L/1084



PSA0218L/1361



PSA0818L/1045



BROCHURES



2012 Catalogue



Total Capability




Antenna Testing



Ground Control



Electronic Warfare



Body Worn



Link16



IED Countermeasures



WiMAX and LTE



Unmanned Systems



C-Band



Radar Systems

Cobham Antenna Systems

M: Cobham Antenna Systems, Lambda House
 Cheveley, Newmarket, Suffolk CB8 9RG, UK
 T: +44 (0)1638 732177
 F: +44 (0)1638 731999
 E: newmarket.sales@cobham.com



Chelton Limited trading as Cobham Antenna Systems
 Cobham Antennas EW Issue 1, 2011-05
 ©Chelton Limited

Chelton Limited has a policy of continuous development and stress that the information provided is a guide only and does not constitute an offer or contract or part thereof.
 Whilst every effort is made to ensure the accuracy of the information contained in this brochure, no responsibility can be accepted for any errors or omissions.
 All photography is protected by copyright and is used with thanks to the respective owners.