

OA4-1.3V/1536

Omni Antenna






Key Features

Designed for Security Applications

Pattern - Omni

Low Azimuth Ripple

Suitable for Outdoor Applications

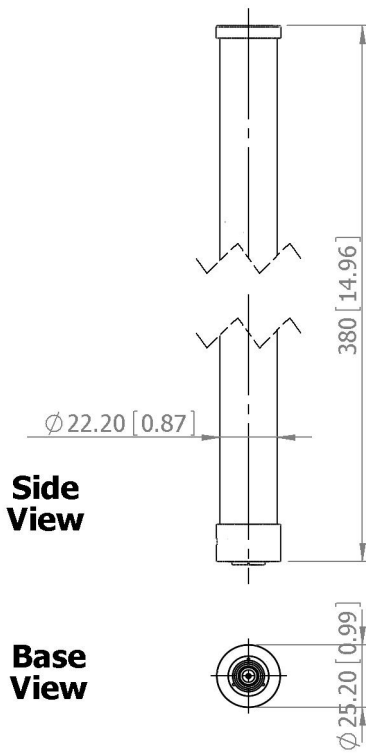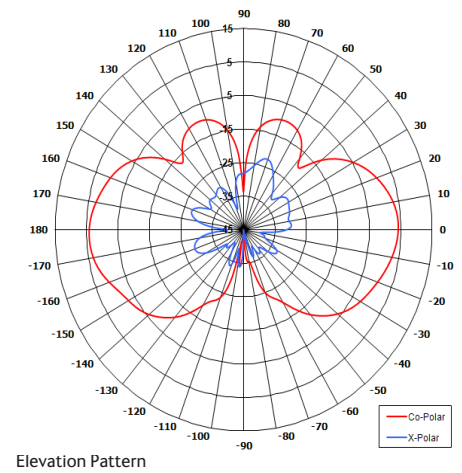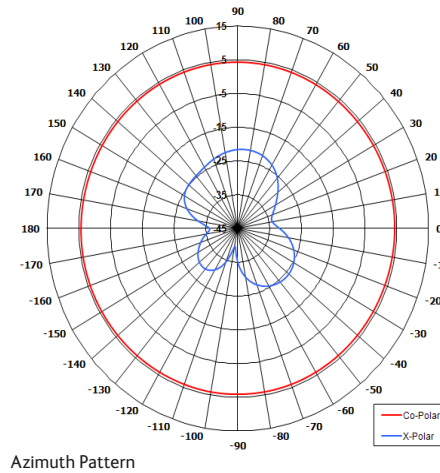

GA: 1536



ELECTRICAL

Frequency	1.15 - 1.40 GHz
Gain	3.8 dBi Typ
Polarisation	Linear (Vertical)
Beamwidth	360° (Az) x 36.5° (EI) Approx
Cross Polar	>25 dB Typ
VSWR	2.6:1 Max, 2:1 Typ
Power Rating	50 W
Front to Back	N/A

MECHANICAL

Standard Finish	Matt Black
Mass	0.2 Kg (0.44 lbs)
Temperature	-40° to +60°C
Wind Loading	N/A

MOUNTING OPTIONS

Kits Available	MK10
----------------	------

See separate data sheets

ADDITIONAL NOTES

Issued 280510

Chelton Limited has a policy of continuous development and stress that the information provided is a guide only and does not constitute an offer or contract or part thereof. Whilst every effort is made to ensure the accuracy of the information contained in this brochure, no responsibility can be accepted for any errors or omissions.

The copyright of antenna designs and images is copyright protected and owned by Chelton Limited.
©Chelton Limited

For further information please contact:
Chelton Limited,
Lambda House, Cheveley,
Newmarket, Suffolk CB8 9RG, UK.
T: +44 (0)1638 732 177
E: newmarket.sales@chelton.com
W: www.chelton.com/microwave