



Azimuth Pattern

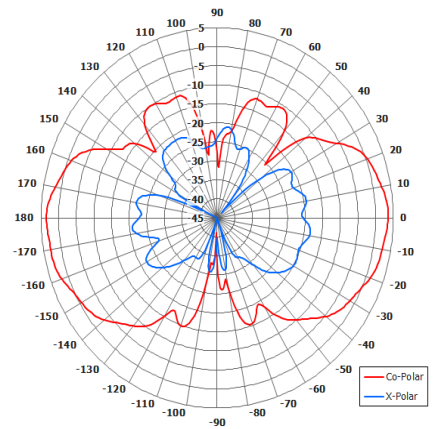

Elevation Pattern

SIDE VIEW

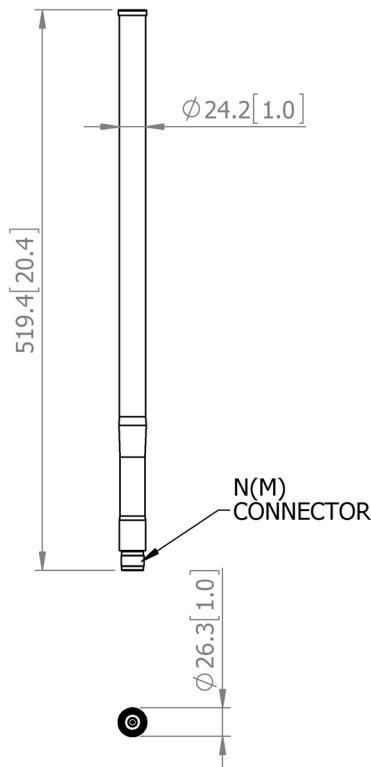

BASE VIEW

GA: 2152



ELECTRICAL

Frequency	1.15 - 1.40 GHz
Gain	3.5 dBi Nom
Polarisation	Linear (Vertical)
Beamwidth	360° (Az) x 36° (El) Approx
Cross Polar	>25 dB Typ
VSWR	2.6:1 Max, 2:1 Typ
Power Rating	50 W
Front to Back	N/A

MECHANICAL

Standard Finish	Black
Mass	0.3Kg
Temperature	-40° to +60°C
Wind Loading	1.7 Kg @ 100mph

MOUNTING OPTIONS

Kits Available	N/A
See separate data sheets	

ADDITIONAL NOTES

Issued 170314

KHOWR/LPLWHGKDVDSROLFRIFRWLRVGHHORSPHW
 DGVWUHVVWWDVWKKHLIRUPDWLRSURLGHGLVDLGHRODGGRRHVRW
 FRVWLWWHDRIIHURUFRWUDFWRUSDUWVWKKUHRKLOVWVWUHHUHIIRUW
 LVPDGHWRHVVUHWKHDFFDRIWVWKKHLIRUPDWLRSURLGHGLWLV
 EURFKUHRUHVSRVLELWVDFEHDFFHSHWGIKUDHUURURRPLVLRV

7KHFRSULKWRIDWDHGHVLDGLPDHVLVFRSULKWSURWHFVHGDG
 RHGEKHOWR/LPLWHG
 KHOWR/LPLWHG

)}RUIUWKHULIRUPDWLRSOHDVH
 FRWDFWKHOWR/LPLWHG
 /DPEGD+RVHKKHOH
 1HPDUNHW6IRON58.
 7
 (HPDUNHWVDOHVFKHOWRFRP
 :FKHOWRFRPPLFURDH